

SANITARY PRESSURE REDUCING VALVE P-130

DESCRIPTION

The ADCA P-130 series **direct acting, spring-loaded diaphragm sensing**, pressure reducing valves, are designed for use on compressed air, water and other gases or liquids compatible with the materials of construction .

MAIN FEATURES

Compact design.
Completely machined from barstock material, no castings or forgings used on the standard version.
No rising stem

STANDARD SURFACE FINISH

Internal wetted parts: 0,5 microns Ra

External :

Body and cover– Fine machined
(mechanical or electro polished as option)

OPTIONS:

Self relieving
Leakage line connection 1/8" (captured vent).
Panel mounting version (thread M45)
Gauge connection on body
Different soft valves for liquids and gases.
Casted cover (CF8M) with rising stem handwheel for economic reasons.
Special execution for steam.

USE:

Compressed air, water and other gases and liquids compatible with the construction.

AVAILABLE

MODELS: P-130

SIZES:

DN1/2" to DN 1" ; DN15 to DN25

OUTLET SPRING

RANGES: 0,2 – 1,5 bar; 0,3 – 3 bar; 0,8 – 8 bar.

CONNECTIONS:


Clamp ends or others on request

INSTALLATION:

Horizontal installation.

ORDER

REQUIREMENTS: Type of fluid
Maximum operating temperature
Inlet pressure and required outlet pressure
Capacity (maximum and minimum).

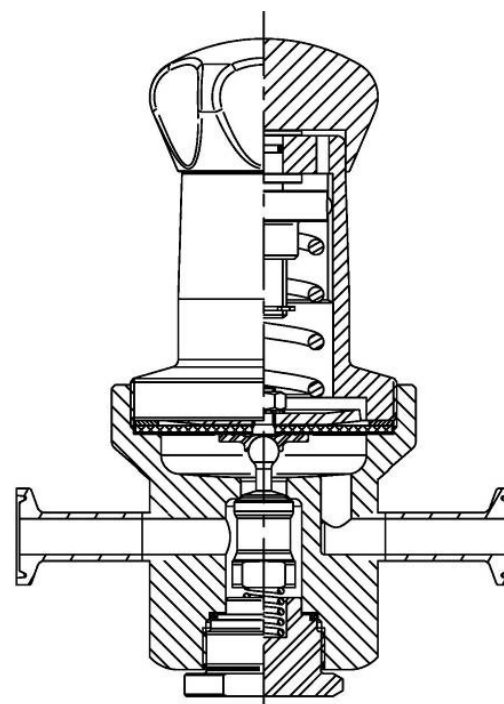

LIMITING CONDITIONS

Valve model	P-130
Body design conditions	PN 16
Max.upstream pressure	16 bar
Max.downstream pressure	8 bar
Min.downstream pressure	0,2 bar
Max.design temperature *	150 °C

*Other on request.

CE MARKING (PED - European Directive 97/23/EC)	
PN 16	Category
DN1/2" to DN 1"	SEP - art. 3, paragraph3

DIMENSIONS (mm)

SIZE DN	A	B	C	D	WGT. Kgs
1/2" (15)	130	37	135	80	2,8
3/4" (20)	130	37	135	80	2,8
1" (25)	130	37	135	80	2,9

Dimensions based on ASME BPE clamped ends
 Different dimensions and standards on request.
 Consult factory for certified dimensions


CAPACITIES

Valve Size	1/2" (15)	3/4"(20)	1" (25)
KVs (m3/h)	3	3,2	3,3

Reduced Kv on request

Connection examples

Clamp	Round thread	Flange

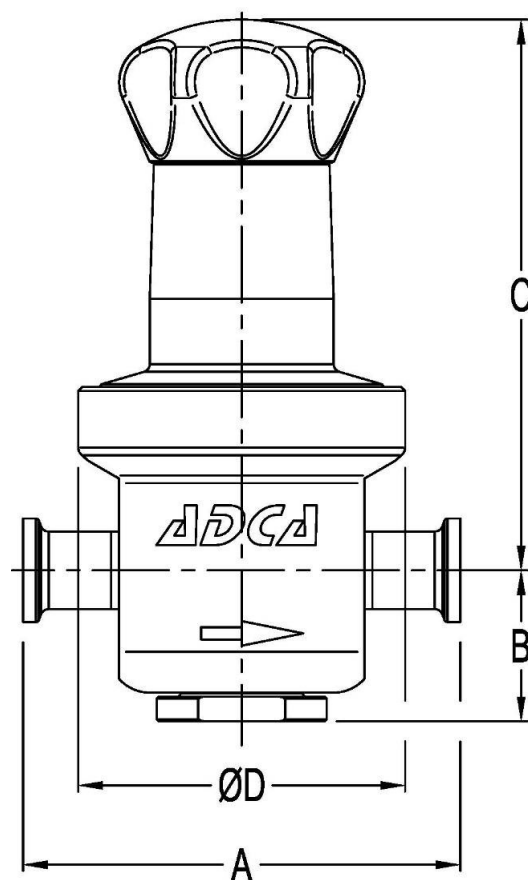
MATERIALS

POS.	DESIGNATION	MATERIAL
1	Valve body	AISI316L / 1.4406
2	Cover	AISI316L / 1.4404
3	Seat cover	AISI316L / 1.4404
4	* O-ring	Viton
5	*Piston	AISI316L / 1.4404
6	* Valve head	AISI316L / 1.4404 ; Viton ,PTFE
7	* Valve spring	AISI302 / 1.4300 (Polished)
9	Pusher disc	AISI 316L / 1.4404
10	* Lower diaphragm	PTFE
11	* Upper diaphragm	EPDM
12	Washer	AISI304 / 1.4301
13	Spring plate	AISI304 / 1.4301
14	Nut	St.steel A2-70
15	* Adjustment spring	AISI302 / 1.4300
16	Spring plate	AISI304 / 1.4301
17	Adjustment screw	AISI304 / 1.4301
18	Retaining ring	St.steel A2-70
19	Handwheel	AISI316L / 1.4404
20	O-ring	EPDM

* Available spare parts.

Remarks: FDA/USP Class VI seals certificate on request
 All valves have a serial number. In case of non-standard valves this number must be supplied if spare parts are ordered.

